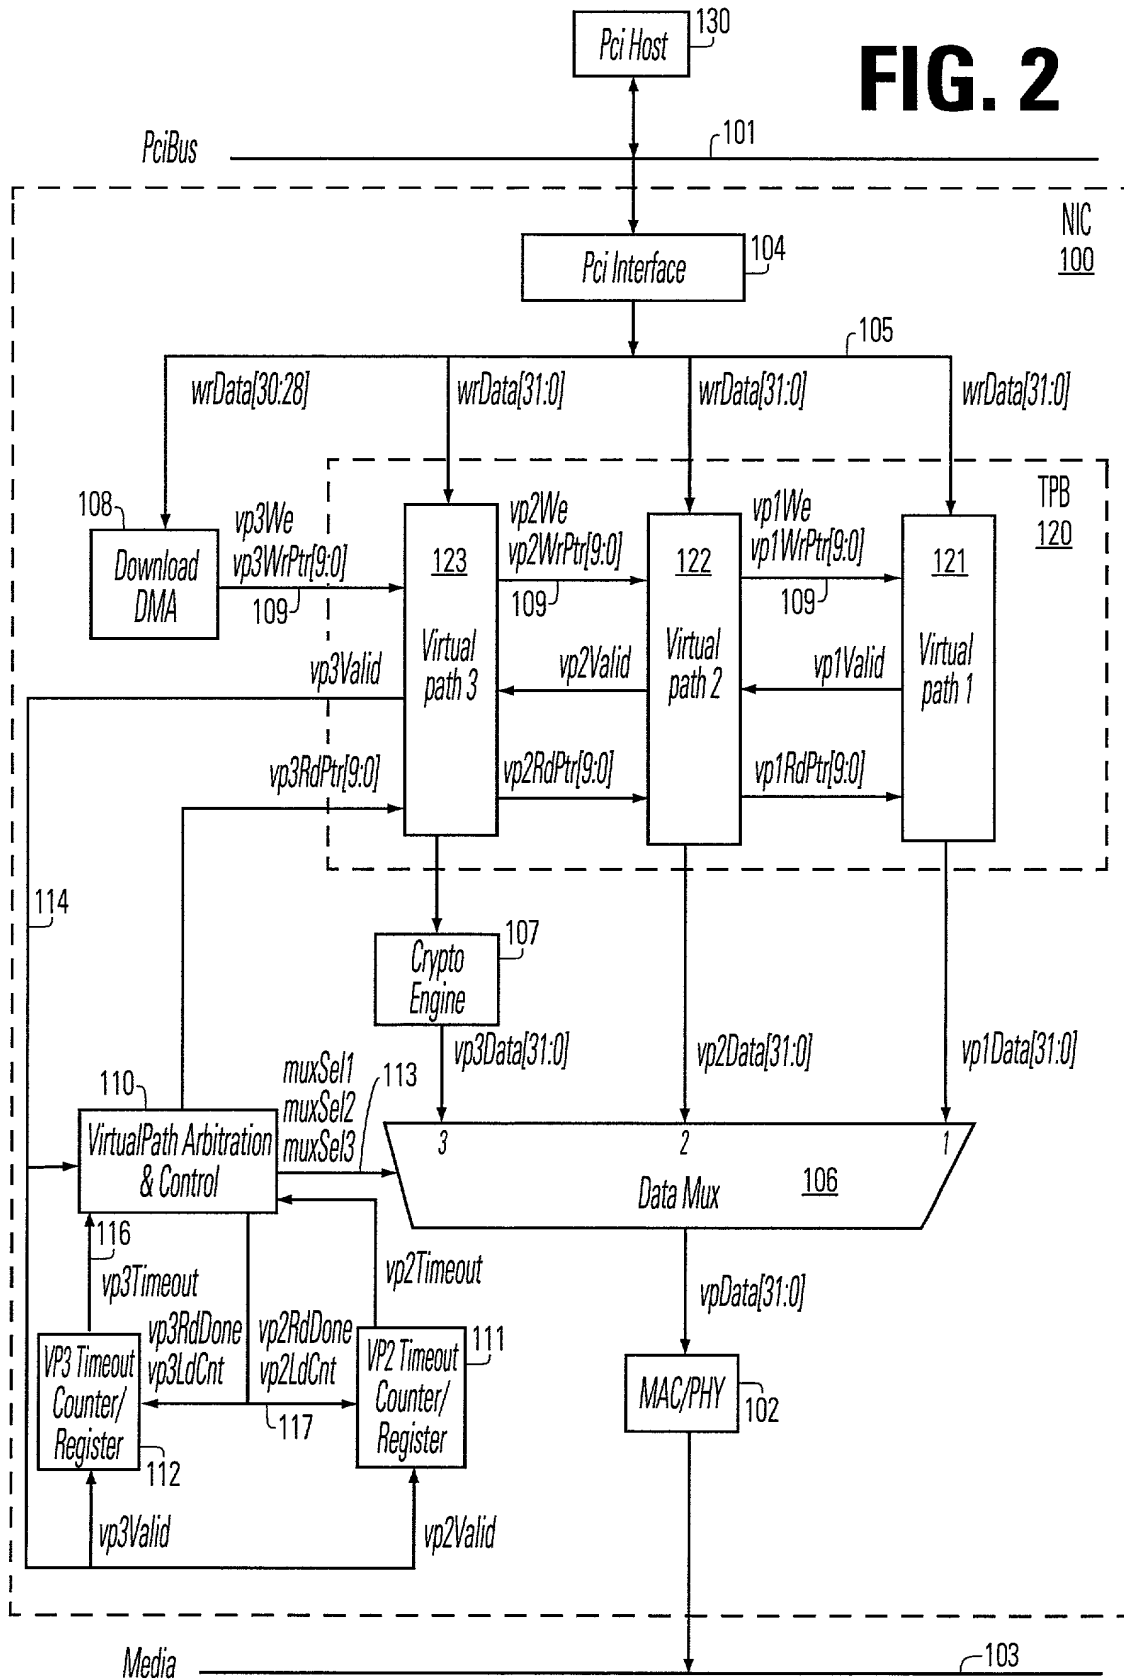


FIG. 1

FIG. 2



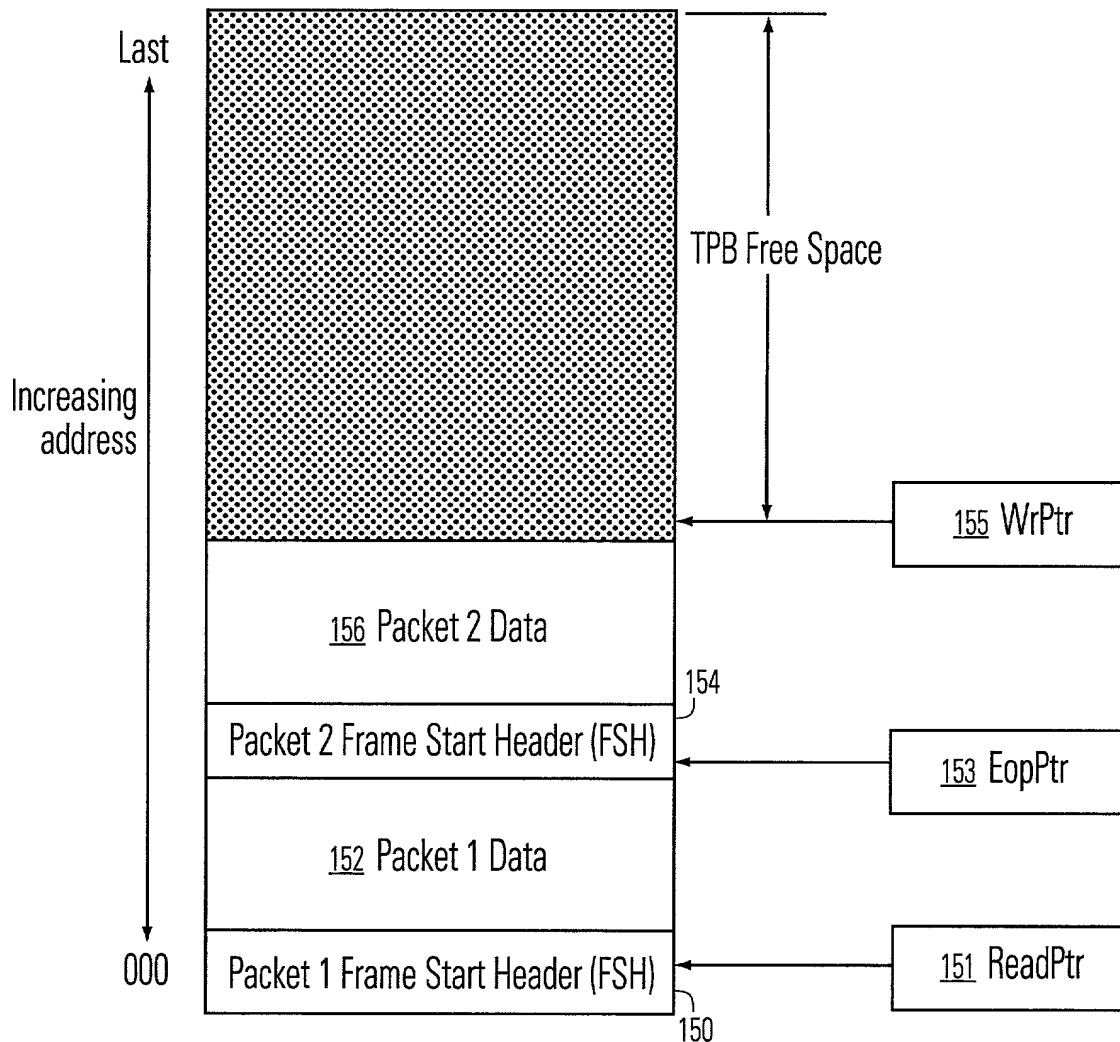


FIG. 3



bit 31: vpValid - set to one to indicate a valid packet has been downloaded into the virtual path.
 bit 30: vp3 - set to one to indicate that virtual path 3 should be used to store downloaded packet.
 bit 29: vp2 - set to one to indicate that virtual path 2 should be used to store downloaded packet.
 bit 28: vp1 - set to one to indicate that virtual path 1 should be used to store downloaded packet.
 bit 9-0: EopPtr - indicate where the packet ends.

FIG. 4

4/13

Reset

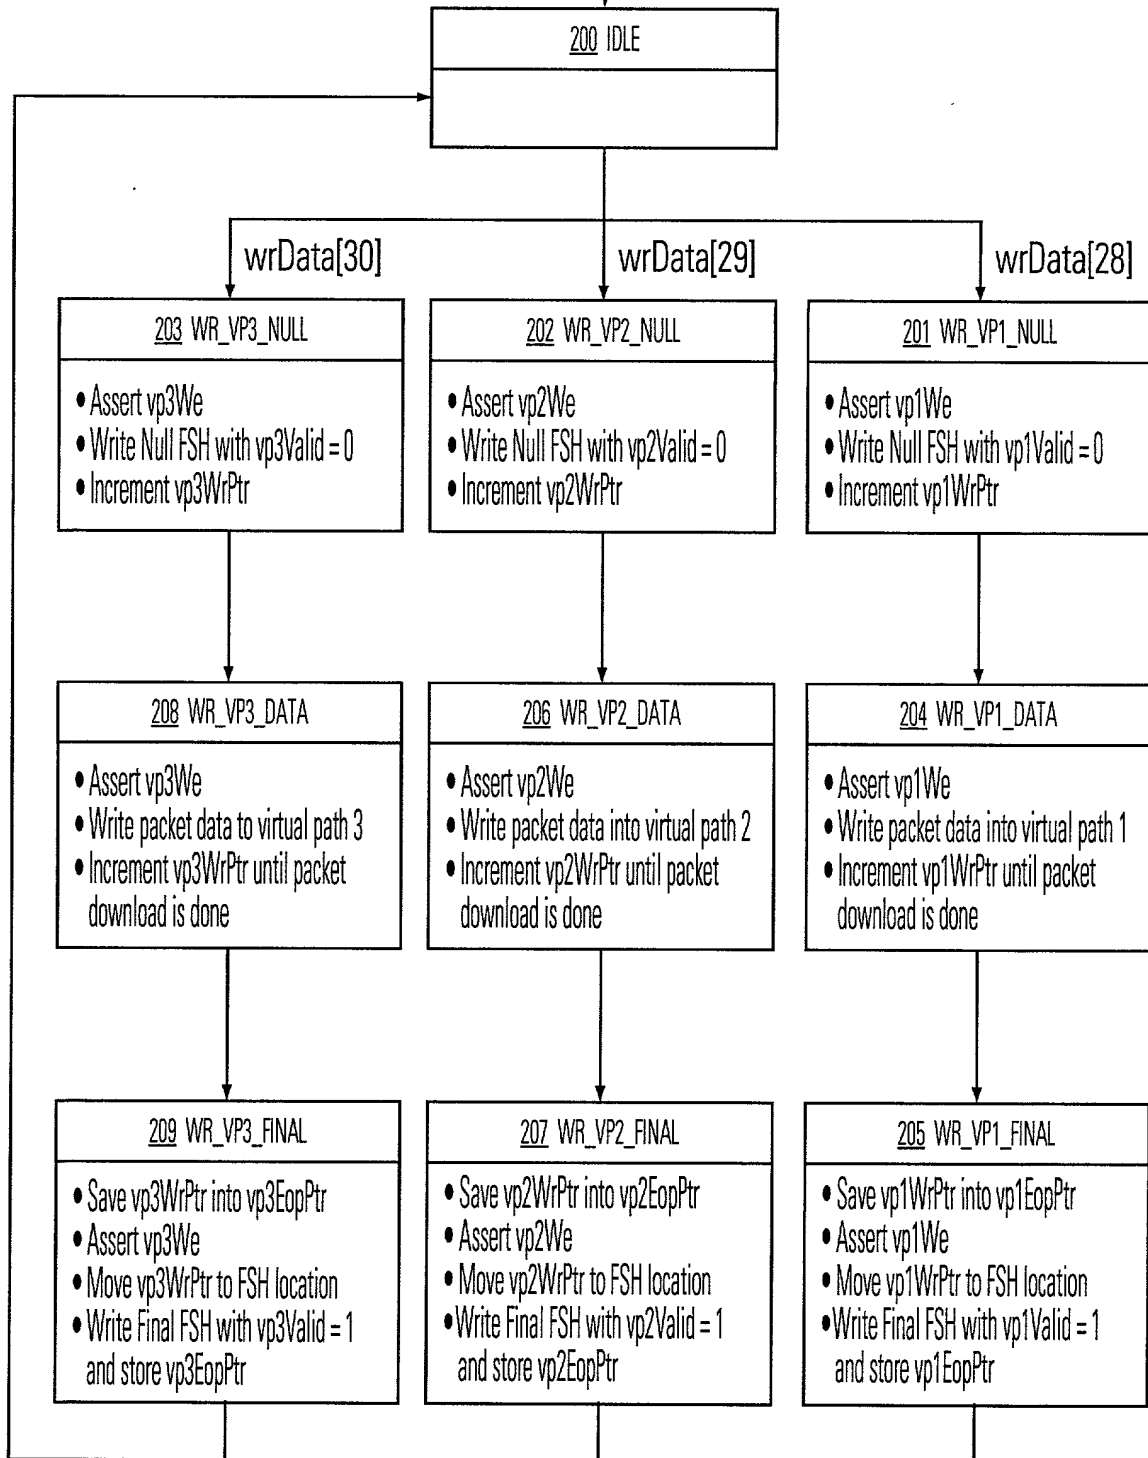
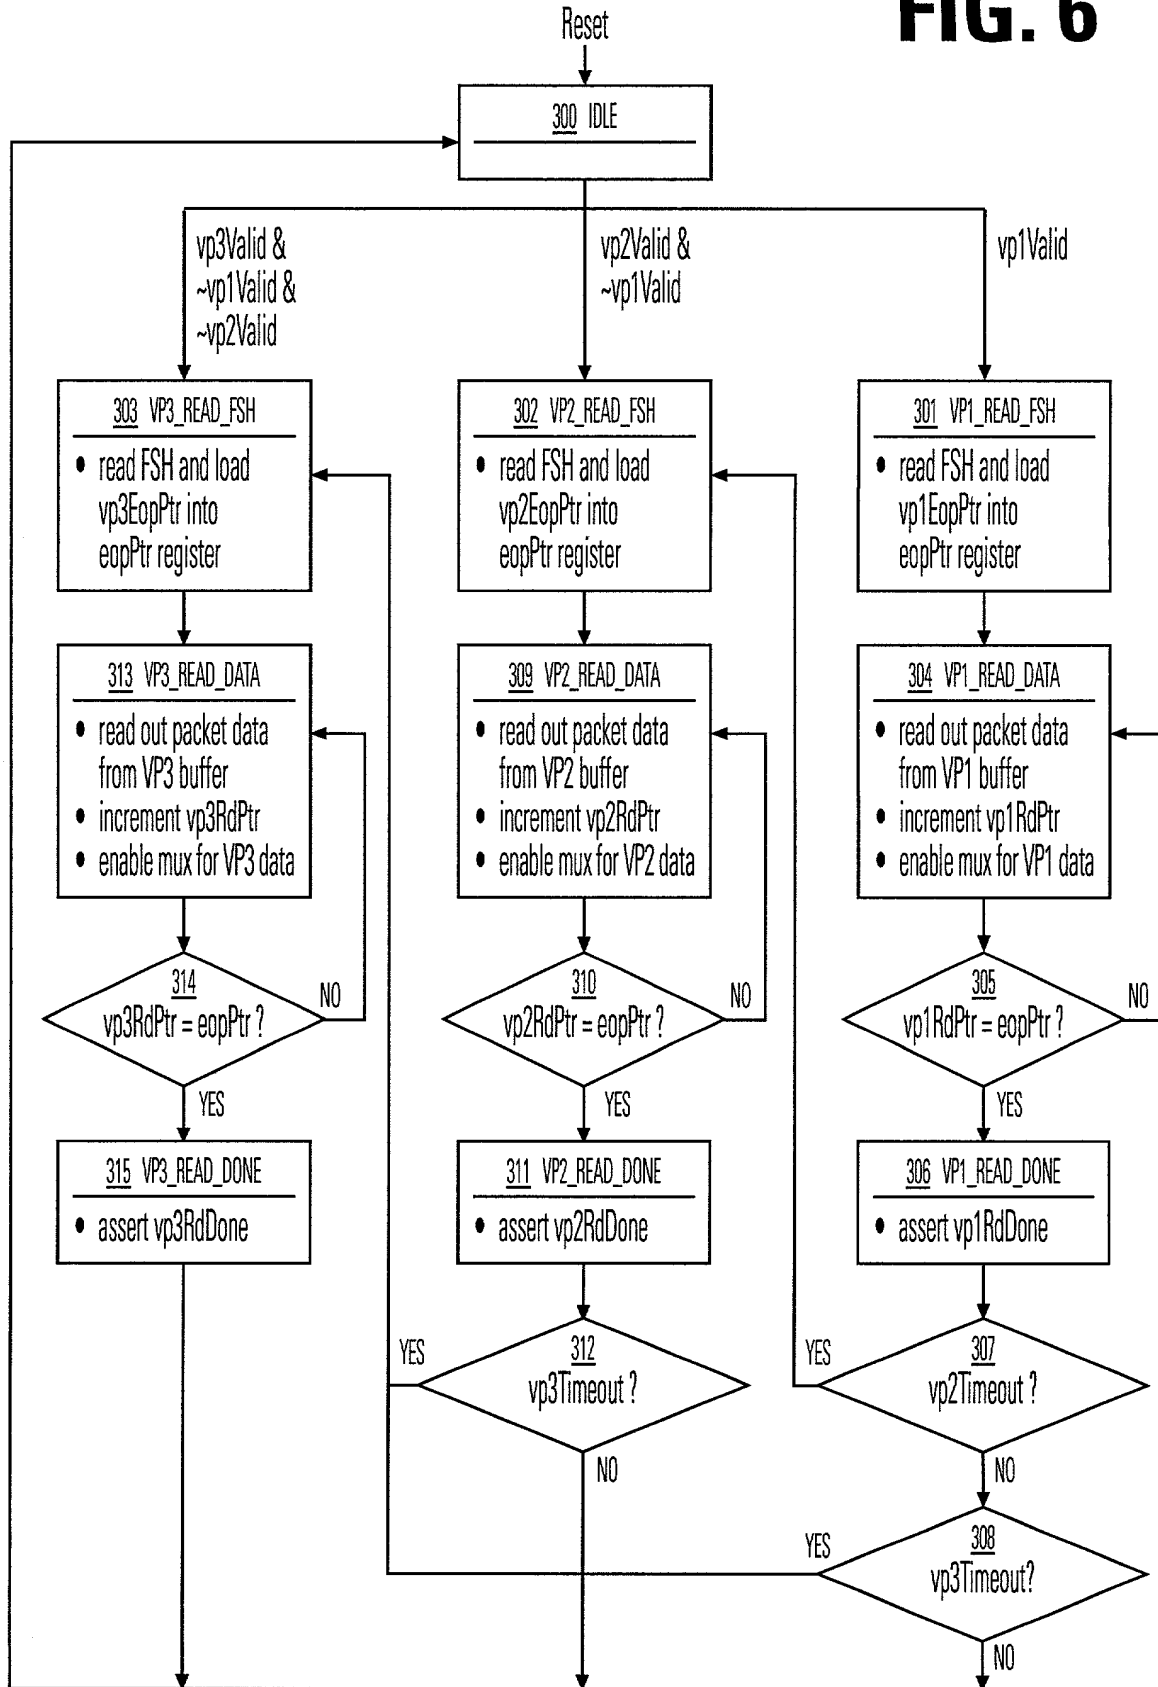


FIG. 5

5/13

FIG. 6



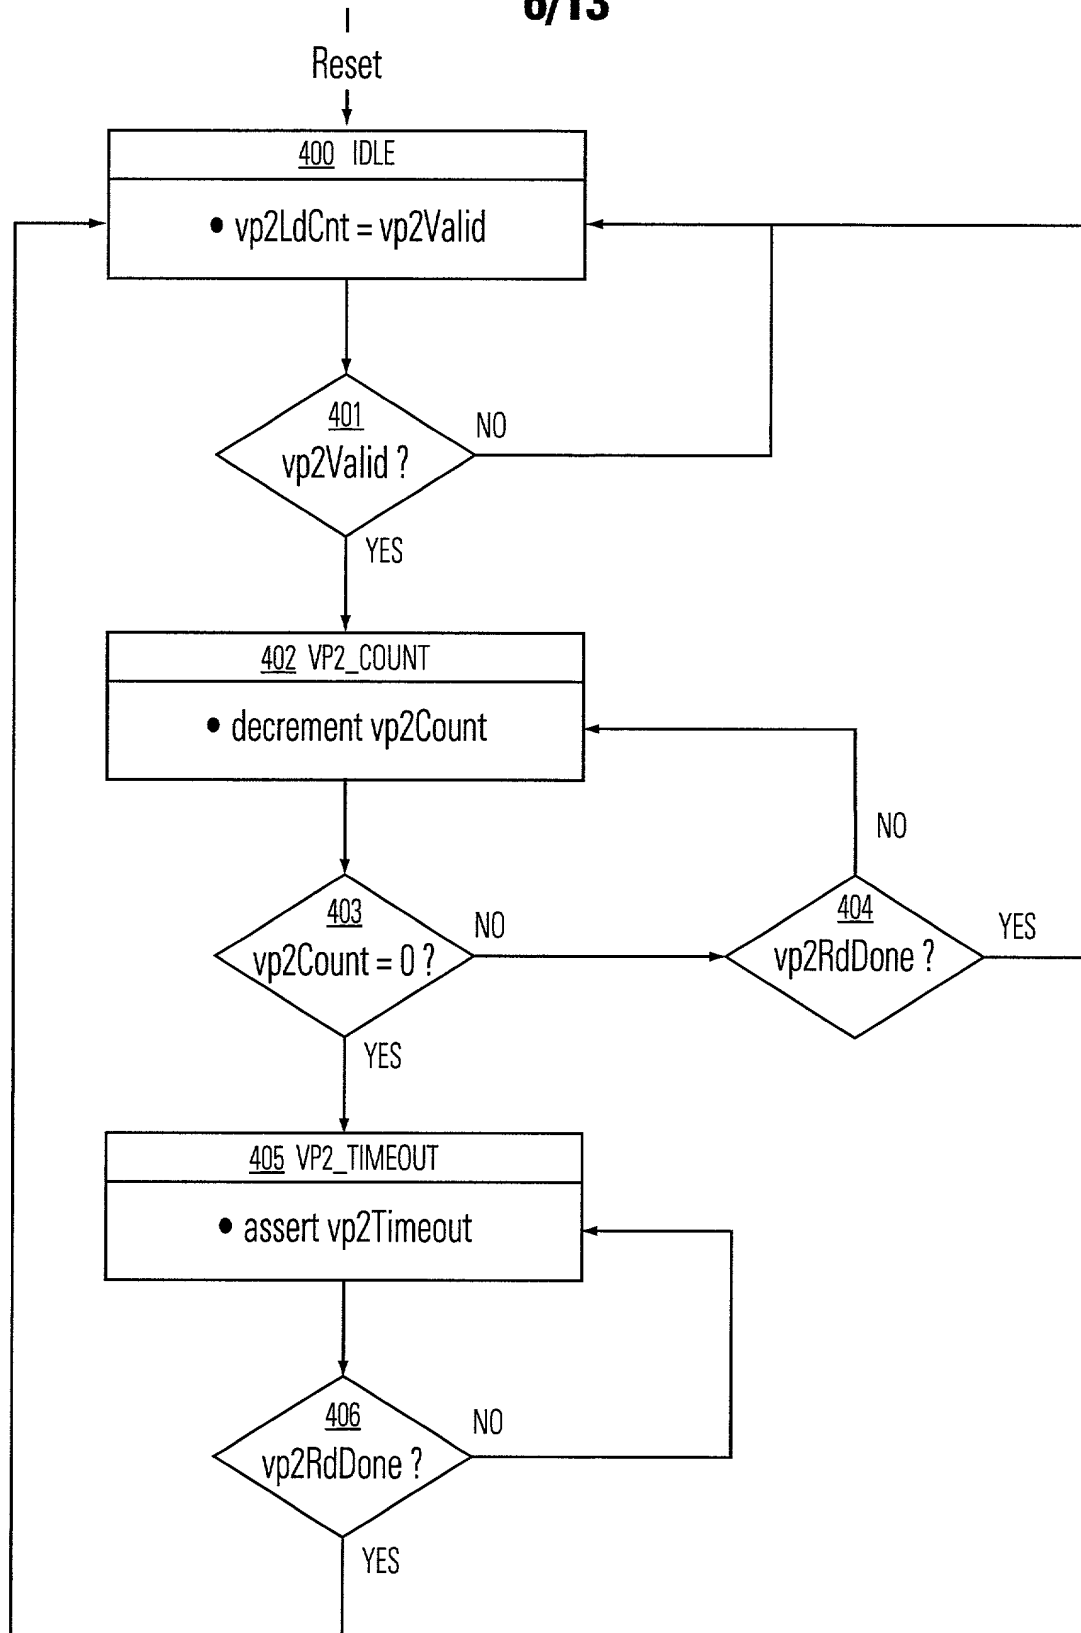


FIG. 7

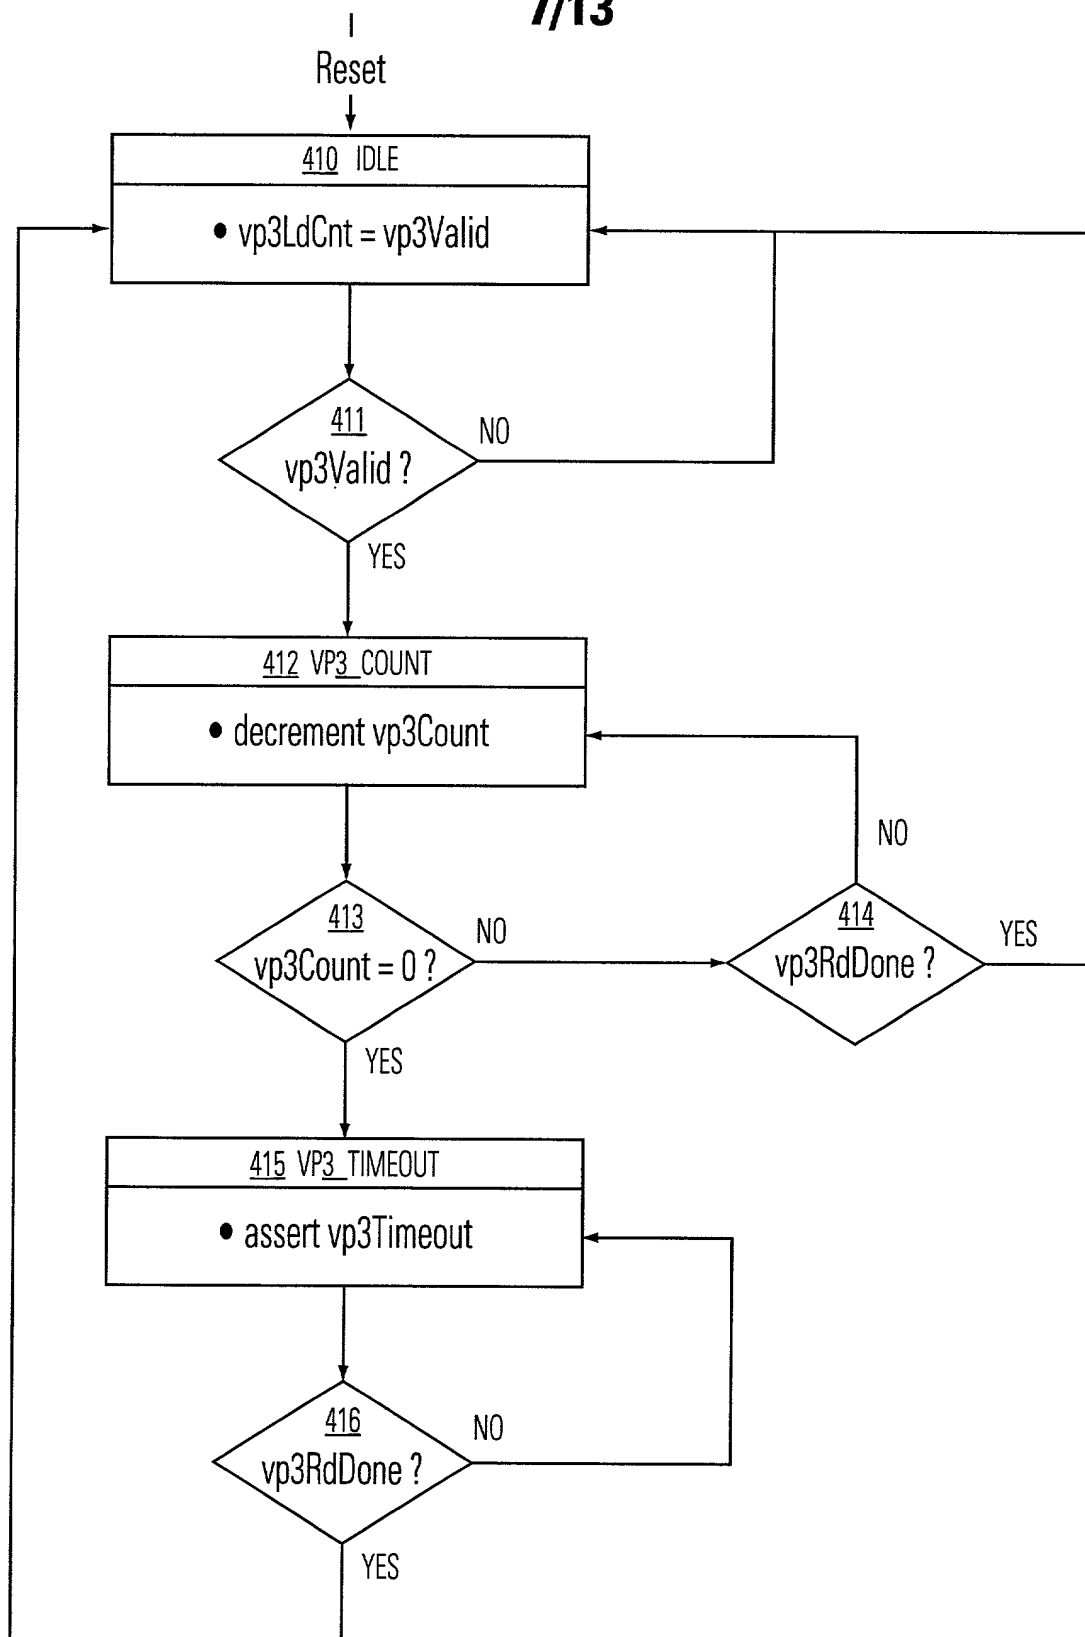
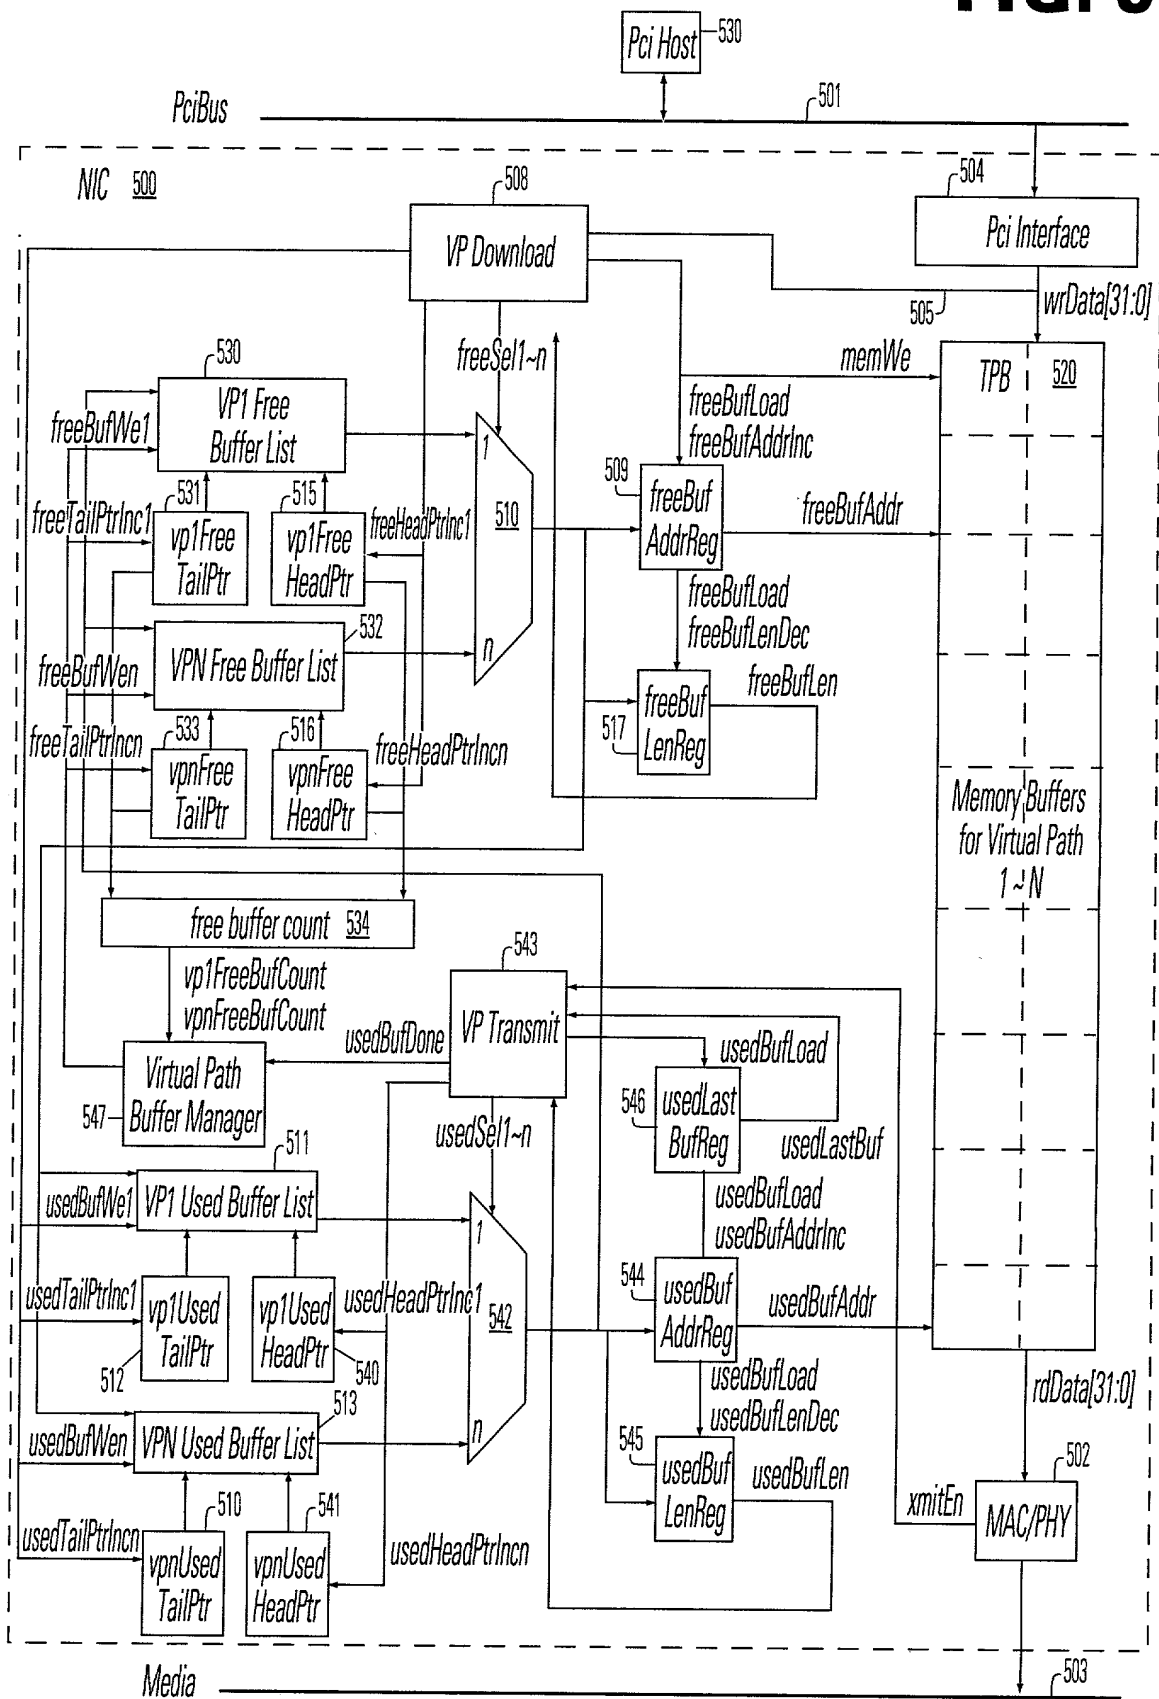


FIG. 8



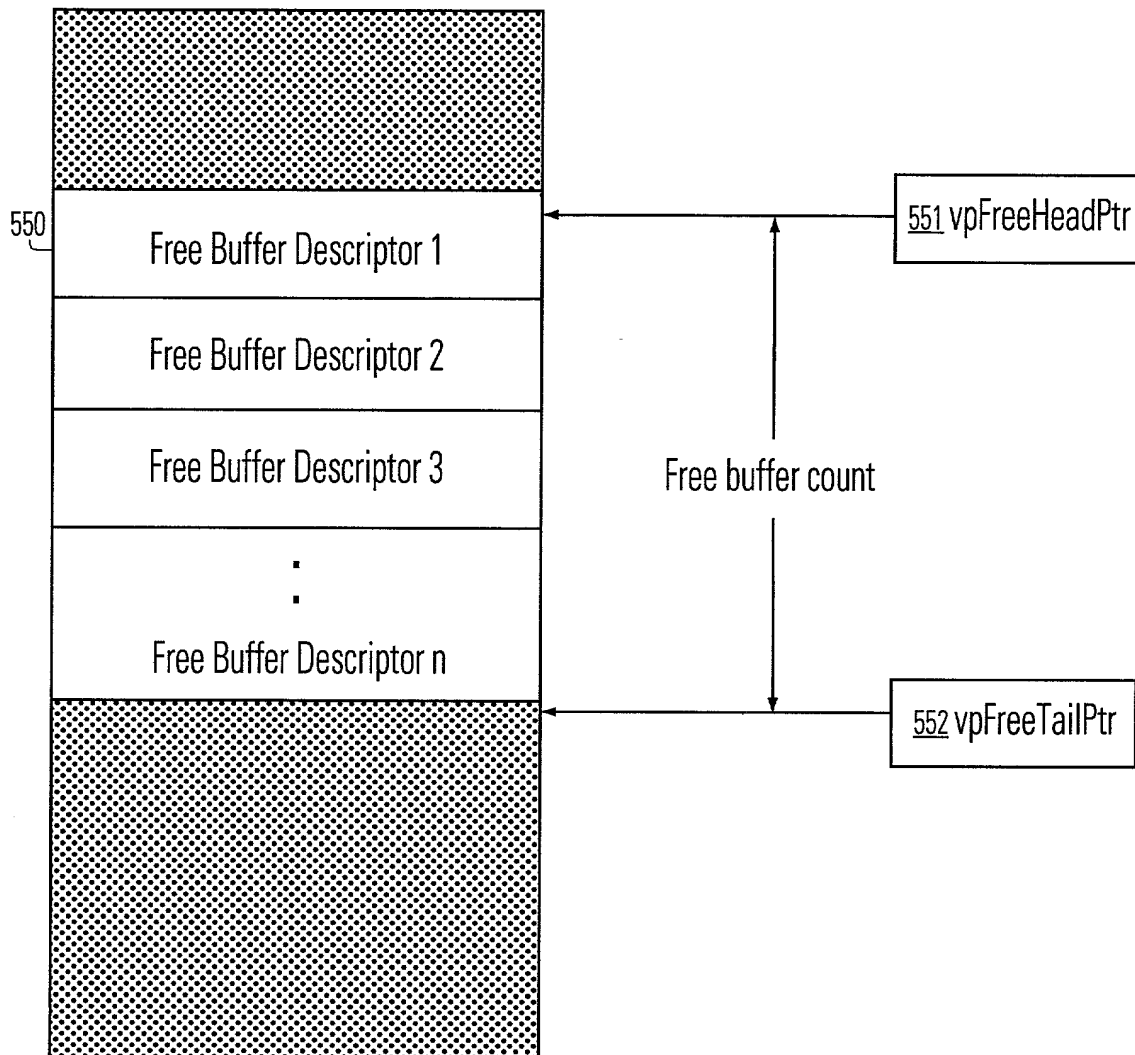


FIG. 10



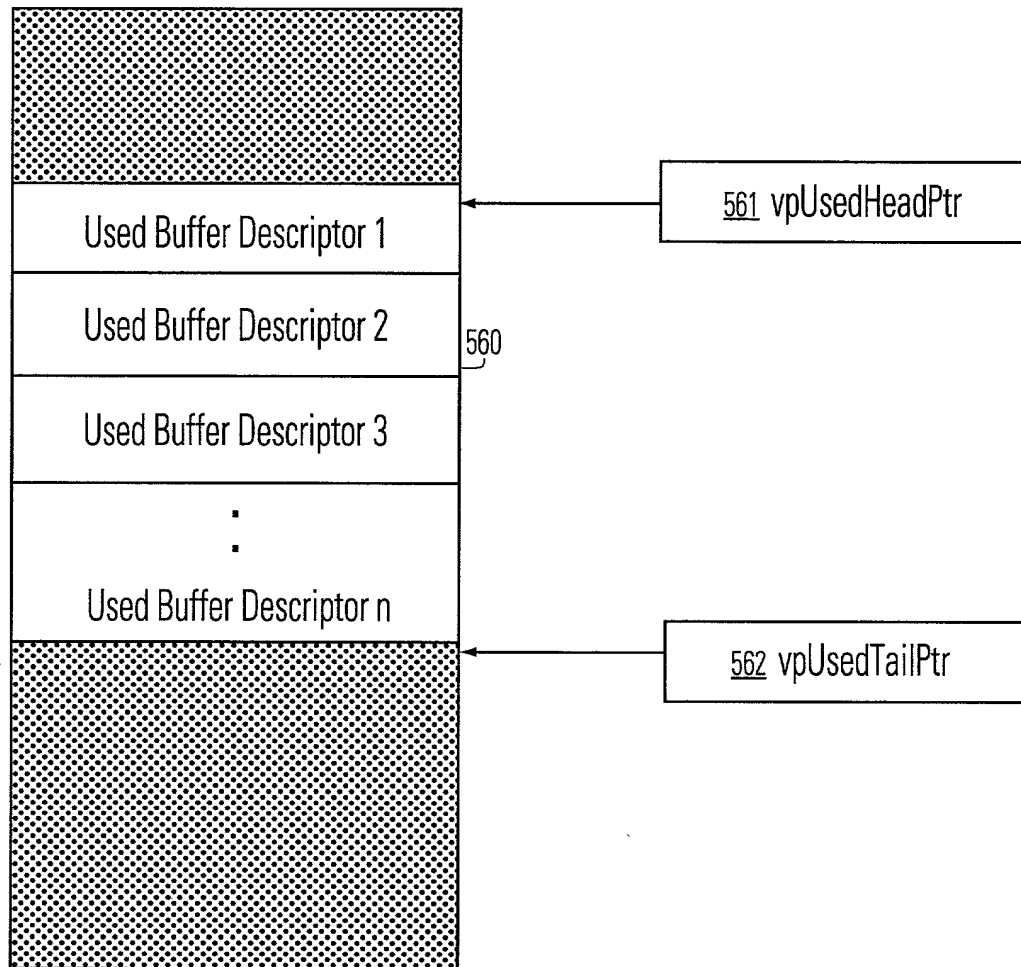


FIG. 11



bit 31: lastBuf - set to indicate the last buffer within a packet.
 bit 22 - 7: bufferAddress - indicate the starting location of each buffer.
 bit 6 - 0 : bufferLength - indicate the length of each buffer if it is not the last buffer.
 Otherwise, indicate where the packet ends.

FIG. 12

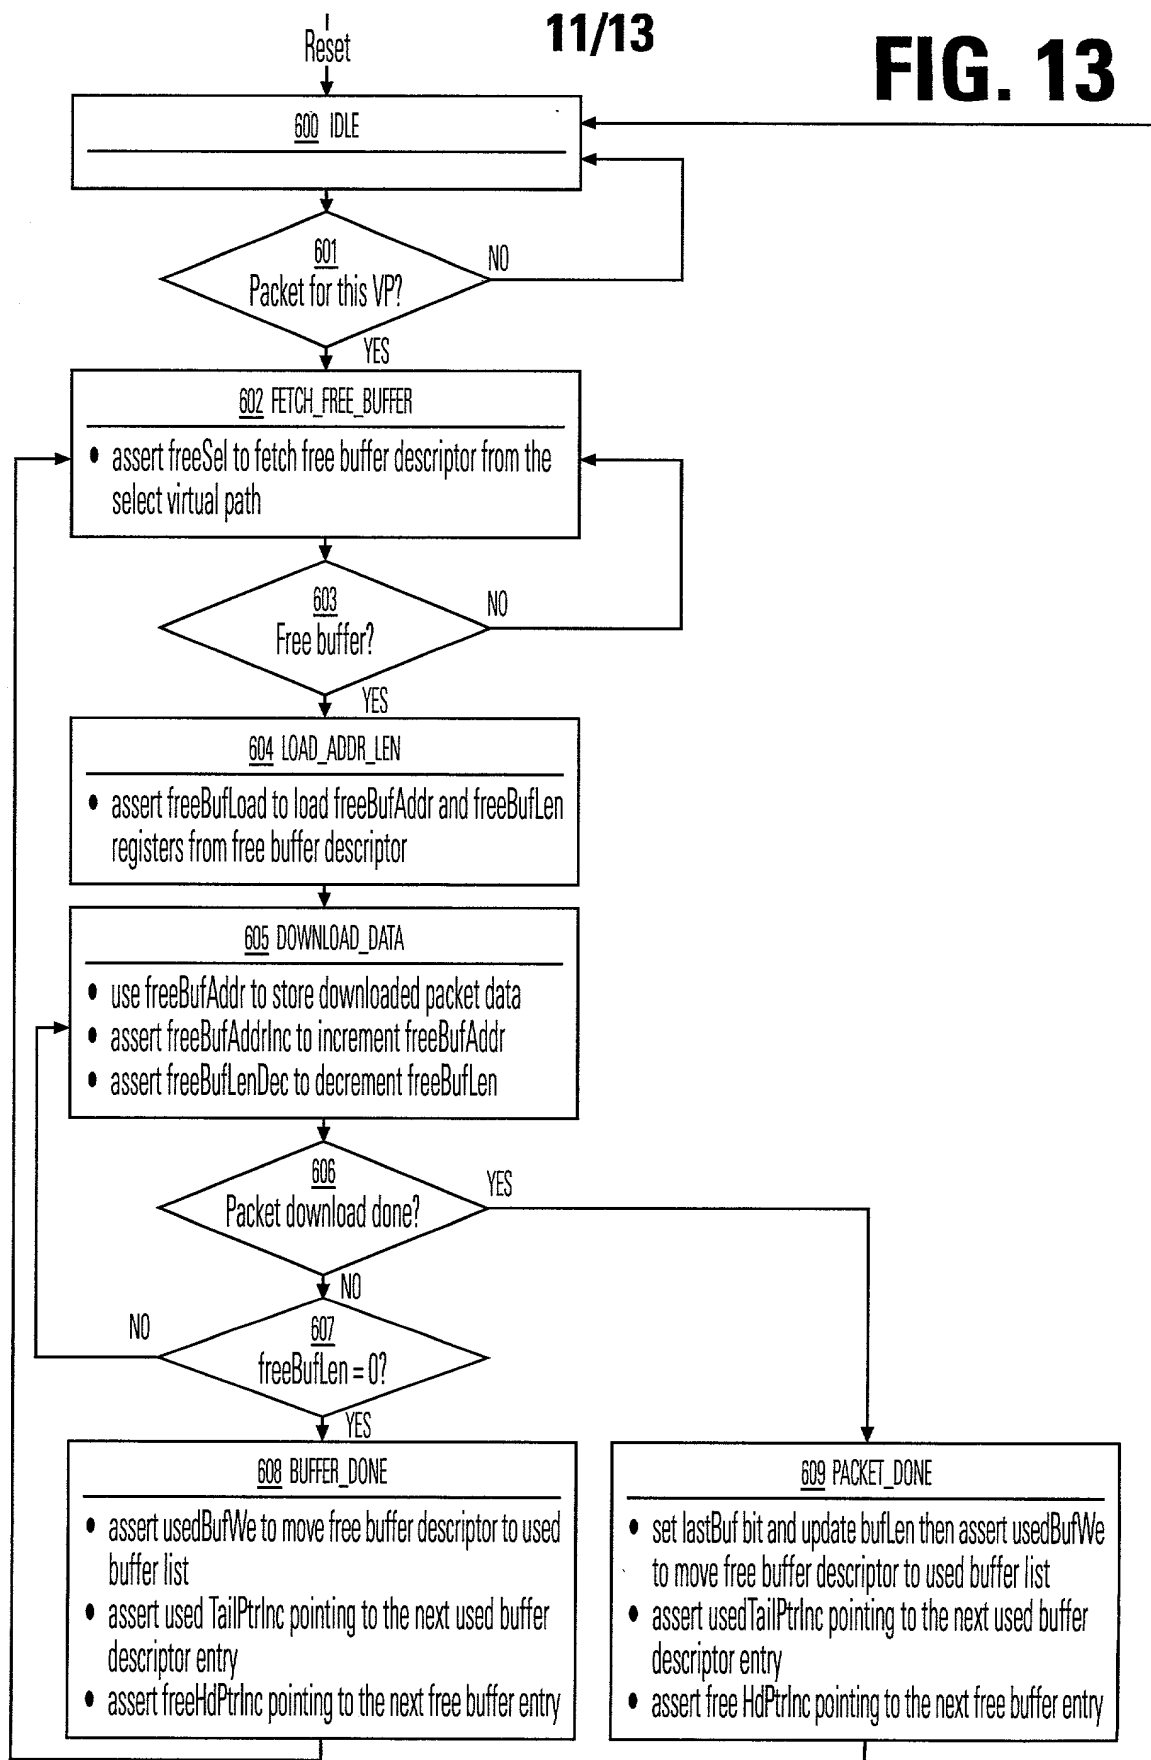

12/13

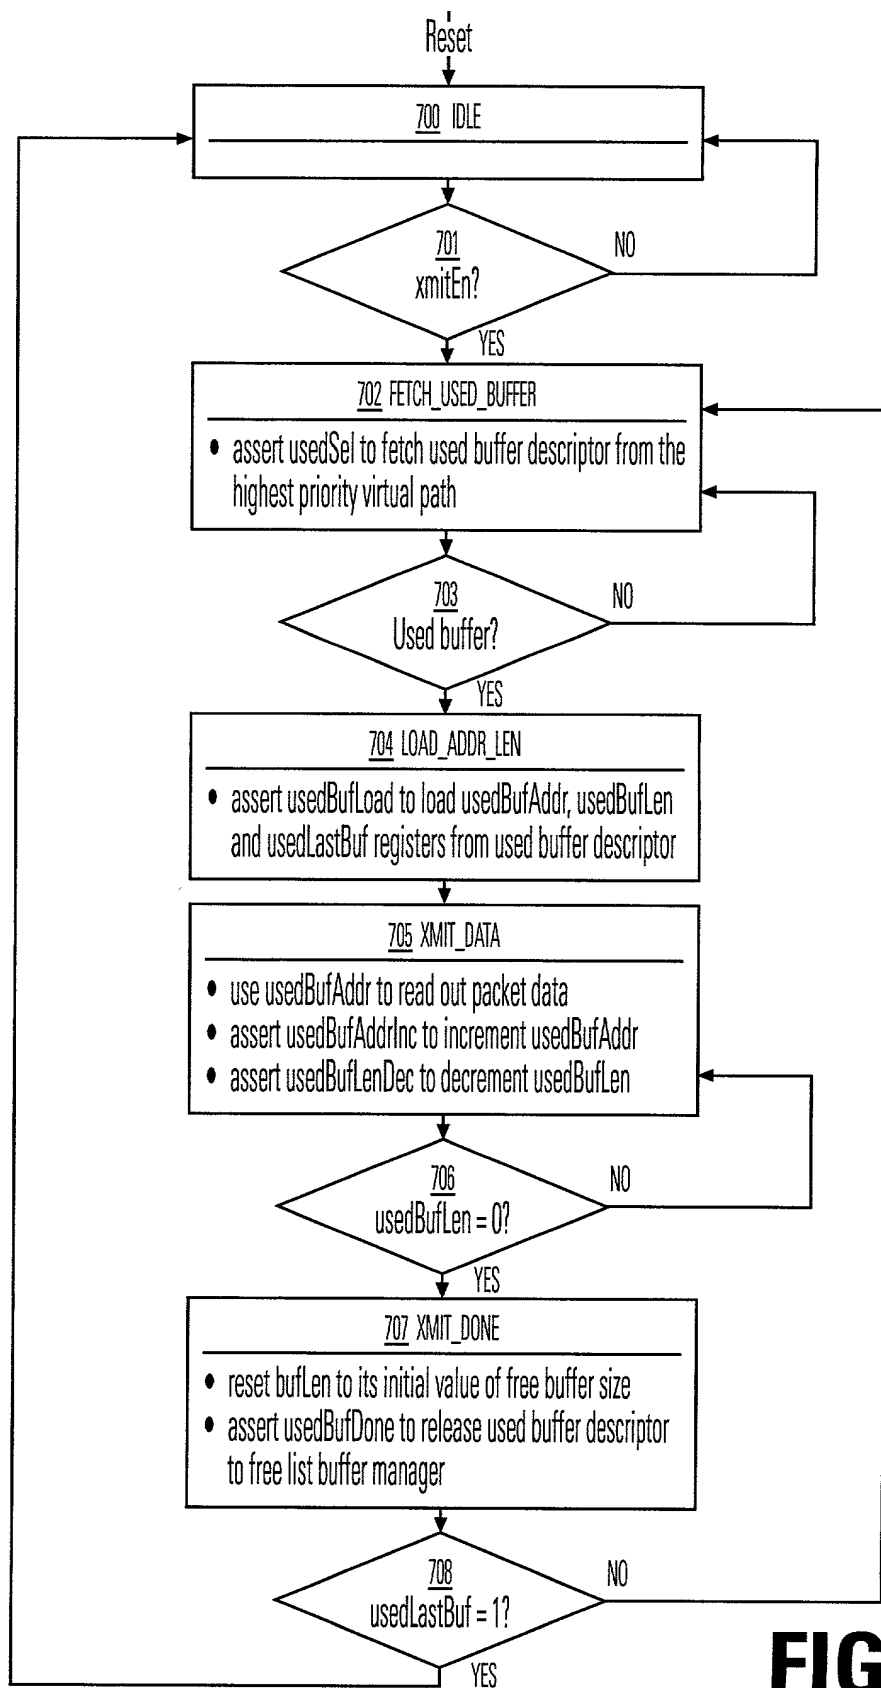


FIG. 14

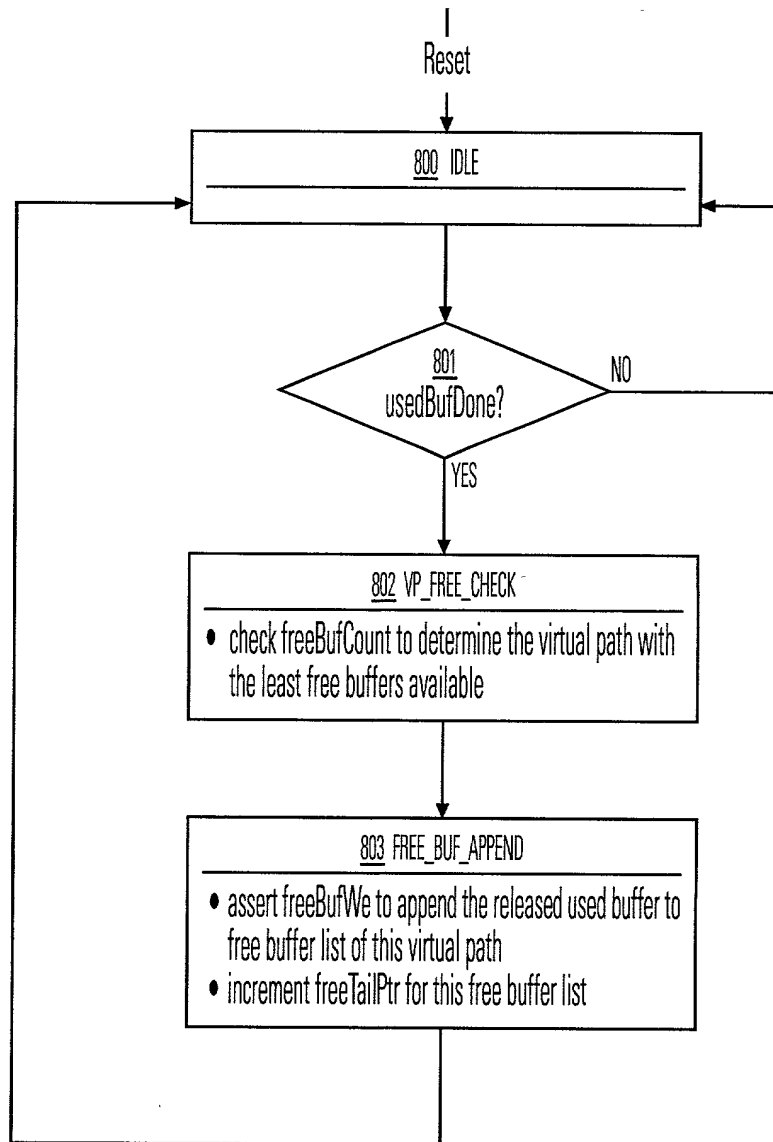


FIG. 15